

Equalizer HAN

The Easee Equalizer HAN is made to optimize your power consumption. It prevents the main fuse from tripping and enables you to utilize all available power for EV charging when possible. It is easily connected to the HAN port on your smart meter and with a one-click setup it communicates with your Charging Robot(s), via Easee LinkTM over radio or WiFi.



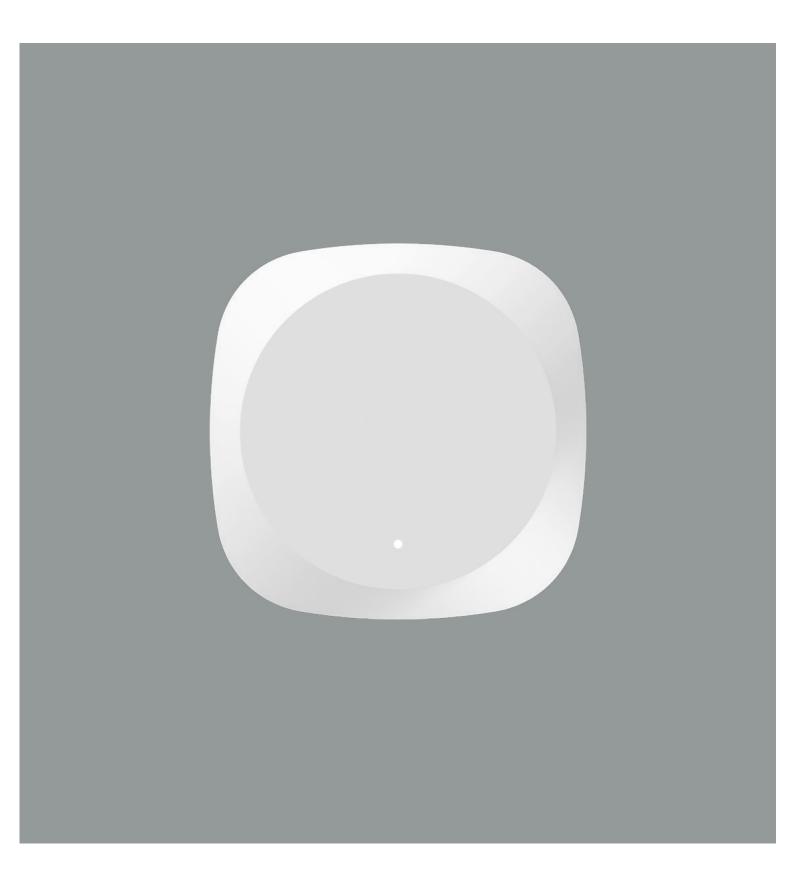

Smart power management

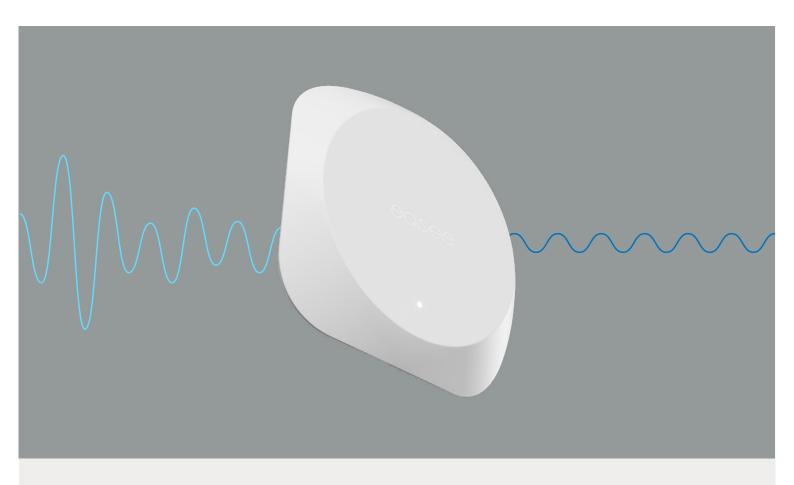

Benefits

- Automatic load balancing between the Charging Robot(s) and the building
- Avoid overload and power interruption while charging your EV
- Charge your EVs faster when the general consumption in the building is low*
- Plug & Play one-click setup*
- Communication over Easee Link™ directly with your chargers or by WiFi*
- Monitor the power consumption in your building through the Easee app
- Snap it directly onto your fuse cabinet with its magnetic backside
- No external power needed
- Up to 50m coverage in open air*
- For a list of supported meters, go to http://easee.support

Charge when there is available power

The Easee Equalizer HAN makes sure that the charging of your EVs is done at the most convenient time, when the demand for other loads is low.

When you have paired your Easee Equalizer HAN to the system, it will automatically start to balance the available power in the building based on its readings and optimize your charging experience.


Easee Link[™] will ensure that the automatic load balancing will continue to work even if the connection with the cloud is interrupted or should there be a problem with your WiFi.



Monitoring

While the main purpose of the Easee Equalizer HAN is to optimize the charging experience, it also provides the opportunity to monitor your daily power consumption through the Easee App.


With a full overview of your home's consumption, you have the power literally in your hands to save energy and hence the environment.



Specifications

Measurement

in mm

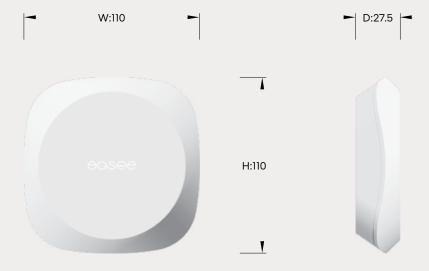

Technical

General

Product (mm): H: 110 x W: 110 x D: 27.5 Packaging (mm): H: 130 x W: 130 x D: 39 Operating temperature: -20 °C to +50 °C

Weight: 110 g Material: PC/ABS Colour: White IP degree: IP40

Supply: 20-32 V DC 30 mA

RJ11 connector

Cabling

Cable length: 1.5 m RJ11 to RJ45 custom made cable It can be extended using an extension cable: up to 200 m Integrated magnets for attaching the product to metal surfaces or to wall mount plate


Connectivity

Easee Link RFTM and WiFi1 HAN (NVE/AMS) smart meter communication Modbus connection to energy meter² Monitor power consumption with the Easee App RFID / NFC reader

¹WiFi is required for normal operation and for future software updates. When offline or unstable, it will use Easee Link RF™ as backup in small installations with one primary charger. Easee $\operatorname{Link} \operatorname{RF}^{\mathsf{TM}} \operatorname{via} \operatorname{radio} \operatorname{may} \operatorname{be} \operatorname{limited} \operatorname{by} \operatorname{walls}, \operatorname{concrete} \operatorname{or} \operatorname{other}$

 $^{\rm 2}$ Only for supported meters.

The product contains







Equalizer HAN

Cable

Wall mount plate

THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.

The latest version of this publication can be downloaded at http://easee.support

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including, but not limited to, copying, recording, retrieving data, or computer networks without the written permission of Easee AS.

Easee and all other Easee product names and slogans are trademarks or registered trademarks of Easee AS. Easee products can be protected by one or more patents.

All other products and services mentioned may be trademarks or service marks of their respective owners.

Illustrations of the product and user interface are exemplary and may differ from the actual appearance.

July 2022 - Version 2.00 © 2020 by Easee AS. All rights reserved.



Easee AS Grenseveien 19 4313 Sandnes Org.nr: 920 292 046 Easee is distributed and maintained by a network of qualified partners and resellers. Find more information and your local partner at: